


Installation Instructions for the 1991-1993 GM 4T60E
With PWM TCC Internal Wire Harness

This wire harness will replace the following GM part numbers: 12082980, 12121130 and 12109436.

1. Note the position of the original wire harness and connectors on the valve body, then remove original wire harness from the transmission.
2. Place the new wiring harness over the valve body in the same position as the original.
3. Connect solenoids to the corresponding keyed connector. See illustration.

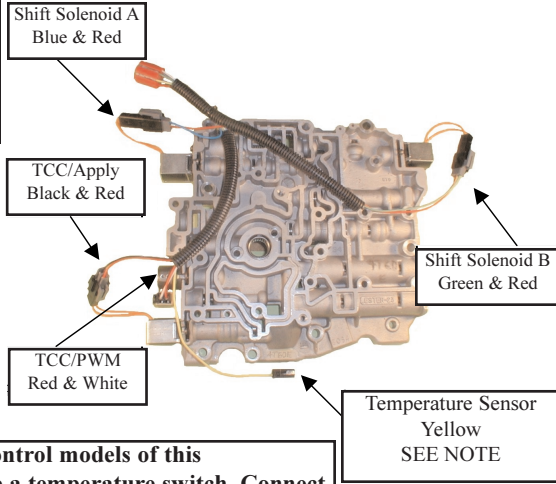

NOTE: Traction control models of this transmission utilize a temperature switch. Connect the yellow wire with the single cavity connector to this temperature switch. Non-traction control models will not use this yellow wire. Tie wire back to avoid any interference.




Form #4333, Rev. B, 11-30-01

Installation Instructions for the 1991-1993 GM 4T60E
With PWM TCC Internal Wire Harness

This wire harness will replace the following GM part numbers: 12082980, 12121130 and 12109436.

1. Note the position of the original wire harness and connectors on the valve body, then remove original wire harness from the transmission.
2. Place the new wiring harness over the valve body in the same position as the original.
3. Connect solenoids to the corresponding keyed connector. See illustration.

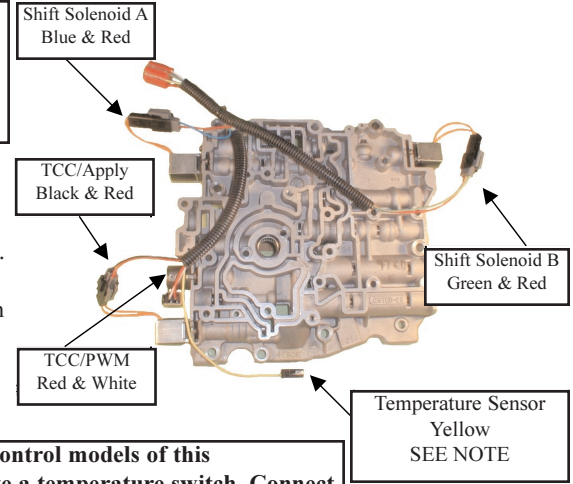

NOTE: Traction control models of this transmission utilize a temperature switch. Connect the yellow wire with the single cavity connector to this temperature switch. Non-traction control models will not use this yellow wire. Tie wire back to avoid any interference.




Form #4333, Rev. B, 11-30-01

Installation Instructions for the 1991-1993 GM 4T60E
With PWM TCC Internal Wire Harness

This wire harness will replace the following GM part numbers: 12082980, 12121130 and 12109436.

1. Note the position of the original wire harness and connectors on the valve body, then remove original wire harness from the transmission.
2. Place the new wiring harness over the valve body in the same position as the original.
3. Connect solenoids to the corresponding keyed connector. See illustration.

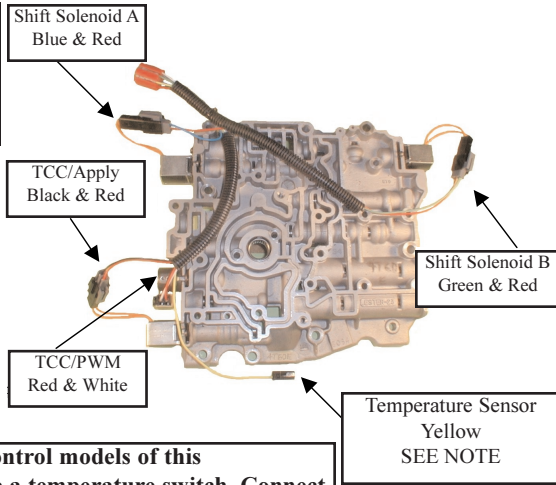

NOTE: Traction control models of this transmission utilize a temperature switch. Connect the yellow wire with the single cavity connector to this temperature switch. Non-traction control models will not use this yellow wire. Tie wire back to avoid any interference.




Form #4333, Rev. B, 11-30-01

Installation Instructions for the 1991-1993 GM 4T60E
With PWM TCC Internal Wire Harness

This wire harness will replace the following GM part numbers: 12082980, 12121130 and 12109436.

1. Note the position of the original wire harness and connectors on the valve body, then remove original wire harness from the transmission.
2. Place the new wiring harness over the valve body in the same position as the original.
3. Connect solenoids to the corresponding keyed connector. See illustration.

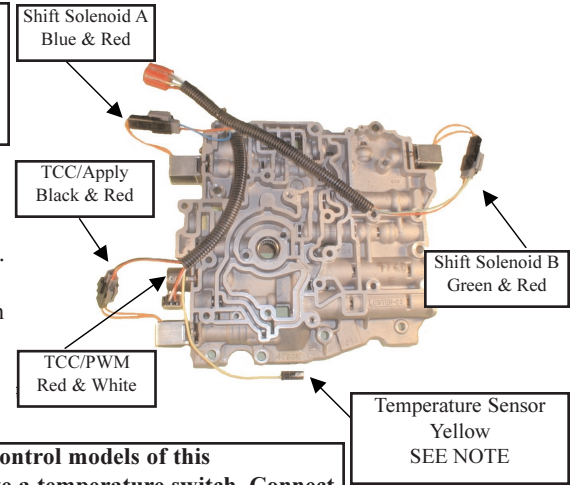

NOTE: Traction control models of this transmission utilize a temperature switch. Connect the yellow wire with the single cavity connector to this temperature switch. Non-traction control models will not use this yellow wire. Tie wire back to avoid any interference.



Form #4333, Rev. B, 11-30-01